




LUMINAIRE DATA-SHEET

Model APOLLO SQUARE IP PLUS
Type Recessed Spotlight Pinhole Series



LUMINAIRE IMAGE, DRAWING

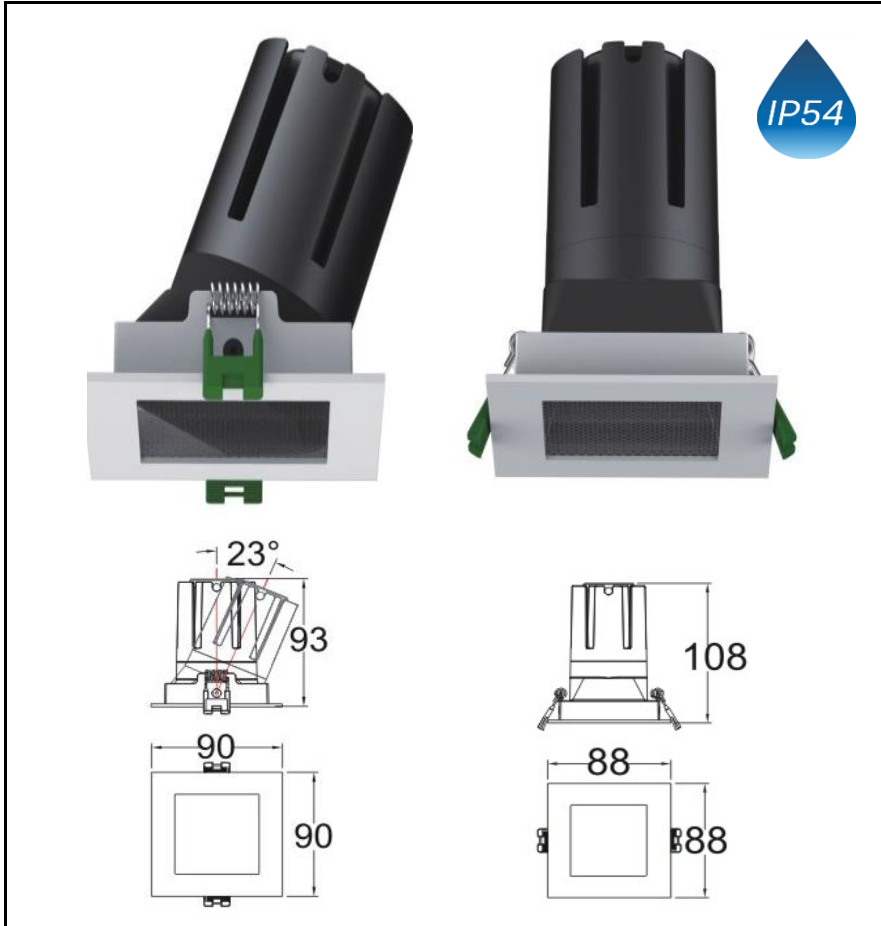

LUMINAIRE GENERAL SPECIFICATION

LAMP TYPE	LED COB
CRI	>90
MacAdam STEP	≤3
INPUT VOLTAGE	AC 220-240V / 50-60 Hz.
MATERIAL	Aluminum Housing White finish
CUT-OFF ANGLE	40°
DIAMETER	90x90mm
CUT-OUT	75x75mm
DEPTH	D 93mm
IP RATING	IP 54
DRIVER TYPE	Remote in False Ceiling
ADJUSTABILITY (in case of adj. version)	23° tiltable 355° rotatable
LUMINOUS FLUX (at 3000K & 24°)	12W 720 lm 15W 900 lm
OPERATING TEMP	-20°C ... +50°C
LIFESPAN	>50,000 working hours

LUMINAIRE DETAILED SPECIFICATION & ARTICLE NUMBER

Model	Trimless / With Trim	Adjustability	Power [W]	CCT [Kelvin]	Optics [°]	Control
Apollo Square IP Plus	1... with Trim	A... Adjustable	12	2... 2700	15	ND... Non Dim
		F... Fix	15	3... 3000	24	DA... Dali
				4... 4000	38	10... 0-10V

ARTICLE NUMBER

ApolloSquareIPPlus	-	1				
--------------------	---	---	--	--	--	--

Model Code

Trim Code

Adjust Code

Power

CCT

Optics

Control Code

Example:

ApolloSquareIPPlus-1F12324ND

With Trim, Fix, 12W, 3000K, 24°, Non Dim

Other versions on request. Please contact us for more information as well as for IES files.