




LUMINAIRE IMAGE, DRAWING

LUMINAIRE GENERAL SPECIFICATION



Drawings Adjustable and Fix Version

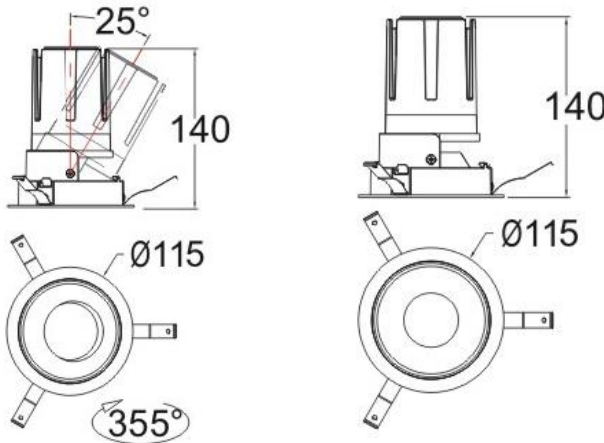

LAMP TYPE	LED COB
CRI	>90
MacAdam STEP	≤3
INPUT VOLTAGE	AC 220-240V / 50-60 Hz.
MATERIAL	Aluminum Housing Metallized Reflector Trim in white finish
CUT-OFF ANGLE	38°
DIAMETER	Ø 115mm
CUT-OUT	Ø 100mm
DEPTH	D 140mm
IP RATING	IP 20
DRIVER TYPE	Remote in False Ceiling
ADJUSTABILITY (in case of adj. version)	25° tilttable 355° rotatable
LUMINOUS FLUX (at 3000K & 24°)	24W 1850lm
OPERATING TEMP	-20°C ... +50°C
LIFESPAN	>50,000 working hours



LUMINAIRE DETAILED SPECIFICATION & ARTICLE NUMBER

Model	Trimless / With Trim	Adjustability	Power [W]	CCT [Kelvin]	Reflector Color	Optics [°]	Control
Eros M	1... with Trim	A... Adjustable F... Fix	24	2... 2700 3... 3000 4... 4000	G... Glossy Silver M... Matt Silver T... Titanium	15 24 38	ND... Non Dim DA... Dali 10... 0-10V

ARTICLE NUMBER

ErosM	-	1		24			
-------	---	---	--	----	--	--	--

Model Code Trim Code Adjust Code Power CCT Reflector Code Optics Control Code

Example: ErosM-1A243G24ND With Trim, Adjustable, 24W, 3000K, Glossy Silver Reflector, 24°, Non Dim

OPTIONAL ACCESSORIES

REFLECTOR COLORS

PRODUCT NAME	IMAGES	REFLECTOR COLORS
Honeycomb Louvre Beam Soft Lens	 	

Please contact us for more information as well as for IES files.