





LUMINAIRE IMAGE, DRAWING

LUMINAIRE GENERAL SPECIFICATION



Drawings With Trim / Trimless

Cut-Off Angle: 38°

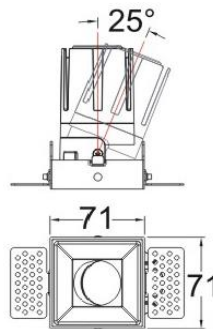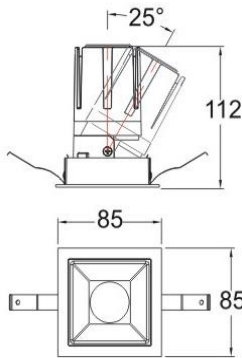

LAMP TYPE	LED COB
CRI	>90
MacAdam STEP	≤3
INPUT VOLTAGE	AC 220-240V / 50-60 Hz.
MATERIAL	Aluminum Housing Metallized Reflector Trim version in white
CUT-OUT	76 x 76mm
DIMENSION	85 x 85mm (trim) 71 x 71mm (trimless)
DEPTH	D 112mm
IP RATING	IP 20
DRIVER TYPE	Remote in False Ceiling
ADJUSTABILITY	25° tiltable 355° rotatable
LUMINOUS FLUX	12W 1043 lm (at 3000K & 24°) 15W 1296 lm
OPERATING TEMP	-20°C ... +50°C
LIFESPAN	>50,000 working hours

LUMINAIRE DETAILED SPECIFICATION & ARTICLE NUMBER

Model	Trimless / With Trim	Adjustability	Power [W]	CCT [Kelvin]	Reflector Color	Optics [°]	Control
Eros SQ Plus	0... Trimless	A... Adjustable	12	2... 2700	G... Glossy Silver	15	ND... Non Dim
	1... with Trim		15	3... 3000	M... Matt Silver	24	DA... Dali
				4... 4000	T... Titanium	38	10... 0-10V

ARTICLE NUMBER

ErosSQPlus	-		A				
Model Code	Trim Code	Adjust Code	Power	CCT	Reflector Code	Optics	Control Code

Example: ErosSQ-1A123G24ND With Trim, Adjustable, 12W, 3000K, Glossy Silver Reflector, 24°, Non Dim

OPTIONAL ACCESSORIES

REFLECTOR COLORS

PRODUCT NAME	IMAGES	REFLECTOR COLORS
Honeycomb Louvre		
Beam Soft Lens		

Please contact us for more information as well as for IES files.