




LUMINAIRE IMAGE, DRAWING

LUMINAIRE GENERAL SPECIFICATION

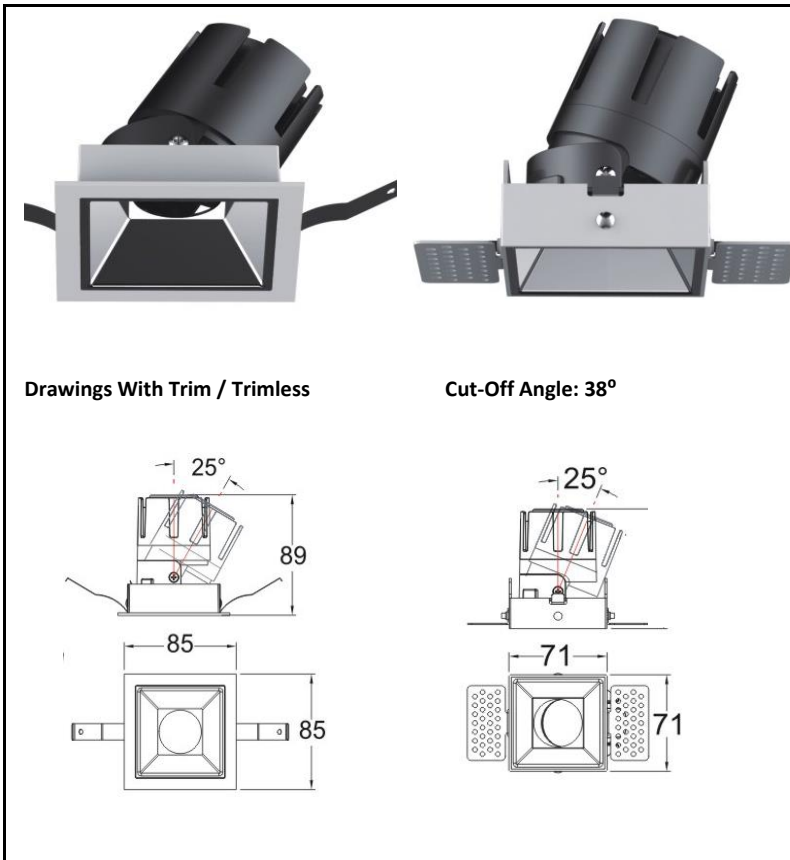

LAMP TYPE	LED COB
CRI	>90
MacAdam STEP	≤3
INPUT VOLTAGE	AC 220-240V / 50-60 Hz.
MATERIAL	Aluminum Housing Metallized Reflector Trim version in white
CUT-OUT	76 x 76mm
DIMENSION	85 x 85mm (trim) 71 x 71mm (trimless)
DEPTH	D 89mm
IP RATING	IP 20
DRIVER TYPE	Remote in False Ceiling
ADJUSTABILITY	25° tiltable 355° rotatable
LUMINOUS FLUX	6W 509 lm (at 3000K & 24°) 9W 777 lm
OPERATING TEMP	-20°C ... +50°C
LIFESPAN	>50,000 working hours

LUMINAIRE DETAILED SPECIFICATION & ARTICLE NUMBER

Model	Trimless / With Trim	Adjustability	Power [W]	CCT [Kelvin]	Reflector Color	Optics [°]	Control
Eros SQ	0... Trimless	A... Adjustable	6	2... 2700	G... Glossy Silver	15	ND... Non Dim
	1... with Trim		9	3... 3000	M... Matt Silver	24	DA... Dali
				4... 4000	T... Titanium	38	10... 0-10V

ARTICLE NUMBER

ErosSQ	-	A					
--------	---	---	--	--	--	--	--

Model Code
Trim Code
Adjust Code
Power
CCT
Reflector Code
Optics
Control Code

Example: ErosSQ-1A93G24ND With Trim, Adjustable, 9W, 3000K, Glossy Silver Reflector, 24°, Non Dim

OPTIONAL ACCESSORIES

REFLECTOR COLORS

PRODUCT NAME	IMAGES	REFLECTOR COLORS
Honeycomb Louvre Beam Soft Lens	 	

Please contact us for more information as well as for IES files.