



LUMINAIRE IMAGE, DRAWING

IP 20



IP 67



LUMINAIRE GENERAL SPECIFICATION

LAMP TYPE	LED SMD
CRI	>85
MacAdam STEP	≤3
INPUT VOLTAGE	DC 24V
MATERIAL	Flexible LED Strip 3M Double-Adhesive Tape Silicon Layer (IP67 Version)
LED QUANTITY / M	60 LEDs per Meter
CUTTING DISTANCE	100 mm
DRIVER TYPE	Remote (to be ordered separately)
OPTICS / BEAM	120°
OPERATING TEMP	-20°C ... +50°C
LIFESPAN	>50,000 working hours

Roll in Sealed / Protected Bag



LUMINAIRE DETAILED SPECIFICATION & ARTICLE NUMBER

Model	Power [W/m]	CCT [Kelvin]	IP Rating
Hera 60	4,8	2... 2700	20
	9,6	3... 3000	67
		4... 4000	

ARTICLE NUMBER


Hera60	-		
--------	---	--	--

Model Code Power CCT IP Code

Example: **Hera60-4.8367** 4.8W/m, 3000K, IP67

LUMINAIRE SPECIFIC PARAMETERS

Lumen / Watt (at 4000K)	Luminous Flux (at 3000K)	Dimension
110 lm/W	530 lm/m 1,060 lm/m	Roll: L 5000mm W 8mm (IP20) W 10mm (IP67)

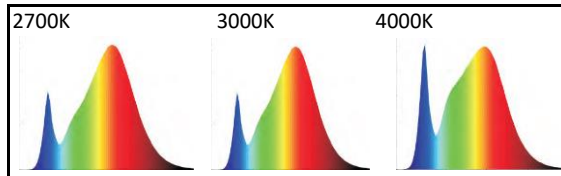

LED DRIVERS / CONVERTERS - AC/DC - CONSTANT VOLTAGE 24V

BRAND	IP 20	POWER	ORDER CODE	IP 67	POWER	ORDER CODE
		35W	LRS-35-24		35W	LPV-35-24
		75W	LRS-75-24		60W	LPV-60-24
		100W	LRS-100-24		100W	LPV-100-24
		150W	LRS-150-24		150W	LPV-150-24

Other Models available on request. Please contact us for more information as well as for IES files.