LUMINAIRE IMAGE, DRAWING

IP54

Drawing of the Product, Reference Picture
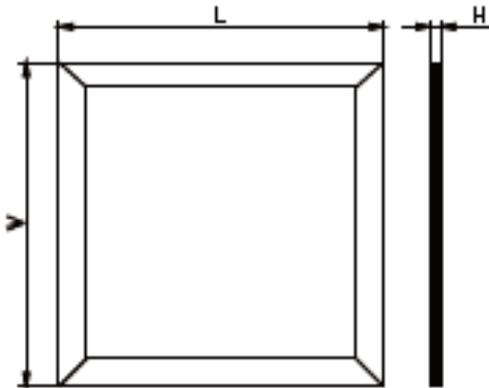
LUMINAIRE GENERAL SPECIFICATION

LAMP TYPE	LED SMD
CRI	>85
MacAdam STEP	≤3
INPUT VOLTAGE	AC 220-240V / 50-60 Hz.
MATERIAL	Aluminum Body
	Opal Diffuser
	White Finish
IP RATING	IP 54
DRIVER TYPE	Remote in False Ceiling
OPTICS / BEAM	Diffuse
OPERATING TEMP	-20°C … +50°C
LIFESPAN	>50,000 working hours

LUMINAIRE DETAILED SPECIFICATION & ARTICLE NUMBER

Model	Power [W]	CCT [Kelvin]	Control
Zeus IP54	36	3… 3000	ND… Non Dim
	40	4… 4000	DA… Dali
	48	6… 6000	10… 0-10V

ARTICLE NUMBER

ZeusIP54	-			
Model Code		Power	CCT	Control Code

Example: **ZeusIP54-364ND**   36W, 4000K, Non Dim

LUMINAIRE SPECIFIC PARAMETERS

Lumen / Watt (at 4000K)	Luminous Flux (at 4000K)	Dimension
120 lm/W	4320 lm	L 595 x W 595
	4800 lm	H 11 mm
	5760 lm	

3000K   4000K   6000K

FLICKER FREE	UGR < 19		ECO FRIENDLY	GREEN PRODUCT	CE	RoHS COMPLIANT
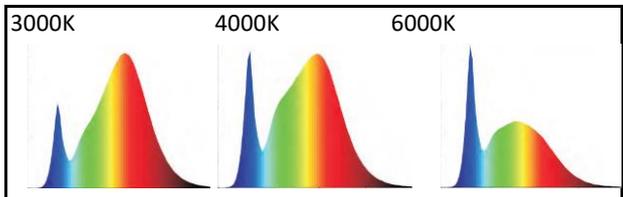
Please contact us for more information as well as for IES files.